




DB SERIES MODEL DB5.5




5
YEAR
WARRANTY

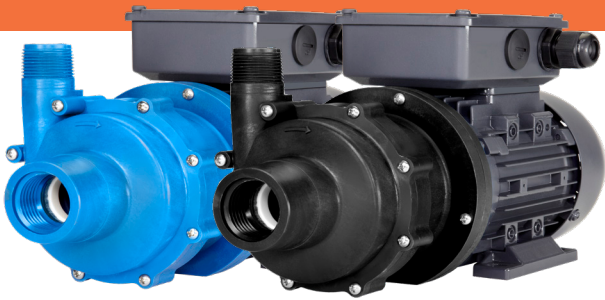


DB5.5 PERFORMANCE 3450 RPM

DB5.5 PERFORMANCE 3450 RPM

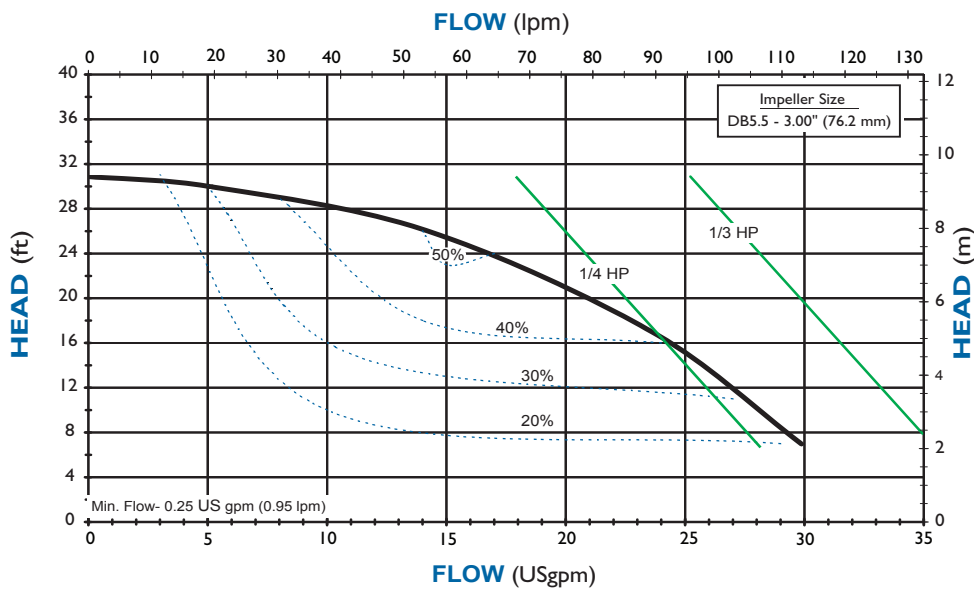

DB5.5 PERFORMANCE 2900 RPM

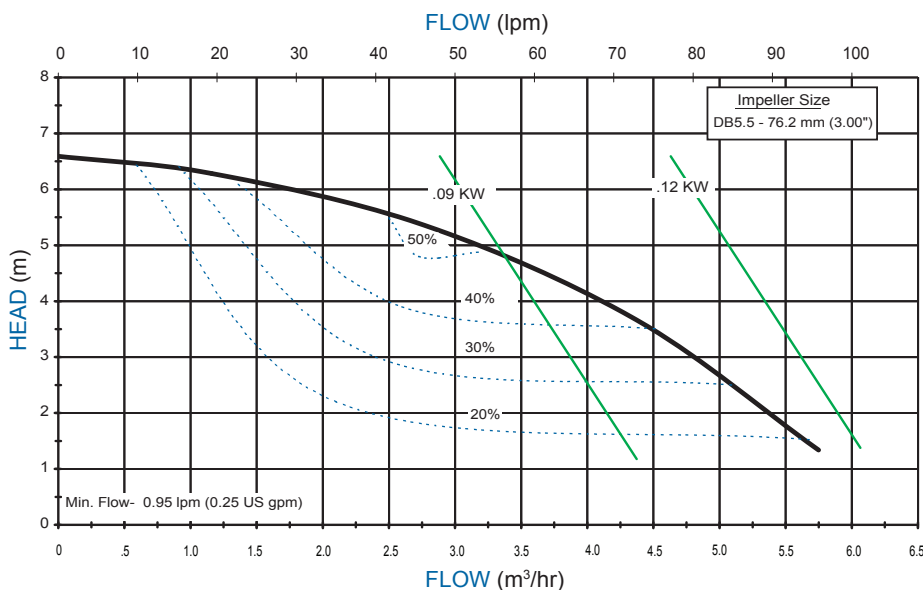

FEATURES & CAPABILITIES

- Five-year warranty
- Extended run dry ability (with carbon bushing)
- High operating efficiency
- Polypropylene or PVDF construction
- Powerful neodymium magnets
- Close-coupled design
- Threaded NPT or BSP connections
- Horizontal or vertical installation
- Back pullout design
- Mounts to IEC 63 & 71 B14 motor frames
- Easy set, measurement free drive
- CE certified
- Working pressure to 60 psi (4.1 bar)
- Specific gravity over 1.8
- Viscosity up to 150 cP
- Polypropylene—180° F (82° C)
- PVDF—220° F (104° C)


APPLICATIONS

- Chemical processing
- Plating
- Water and wastewater
- Electronics
- Pharmaceuticals
- Wet scrubber
- Pulp and paper
- Heat exchanger
- and many more!



DB SERIES

SPECIFICATIONS

Description	Polypropylene	PVDF
1 Impeller housing	Glass-fiber reinforced polypropylene (GF PP)	Carbon-fiber reinforced PVDF (CF PVDF)
1A Impeller housing thrust ring	High purity alumina ceramic	
2 O-ring	FKM or EPDM	
3 Impeller	GF PP and neodymium iron boron magnets encapsulated in unfilled polypropylene	CF PVDF and neodymium iron boron magnets encapsulated in unfilled PVDF
3A Impeller thrust ring	Glass-fiber molybdenum disulfide filled PTFE	
3B Bushing	Carbon, PTFE, high purity alumina ceramic	
4 Shaft	High purity alumina ceramic	
5 Barrier/Motor adapter	GF PP	CF PVDF
5A Barrier thrust ring	Silicon carbide	
6 Outer drive magnets	Nickel-plated neodymium iron boron magnets/epoxy painted steel	

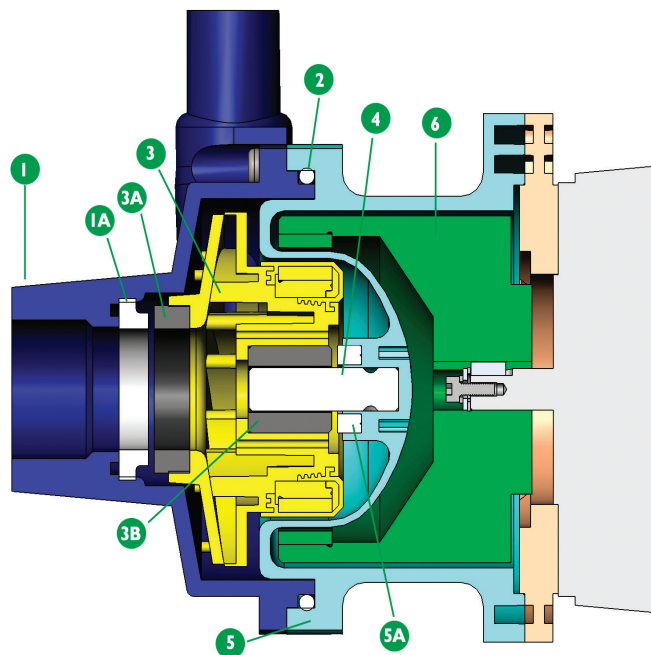

DIMENSIONS

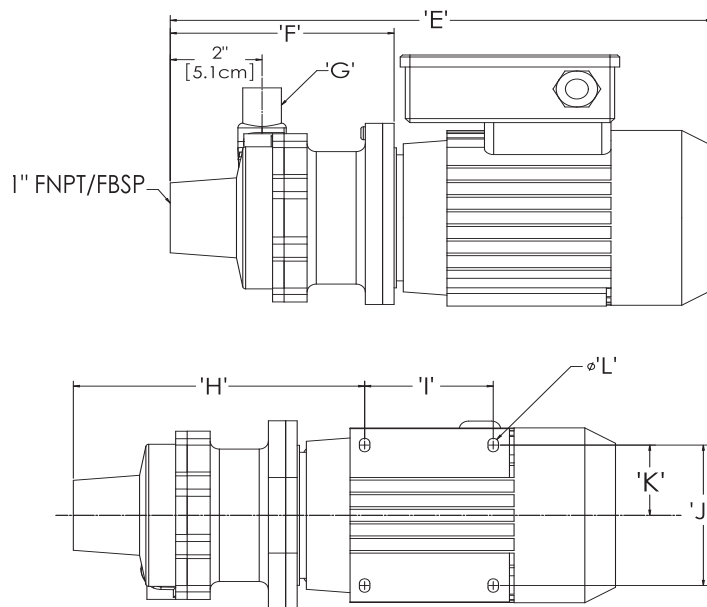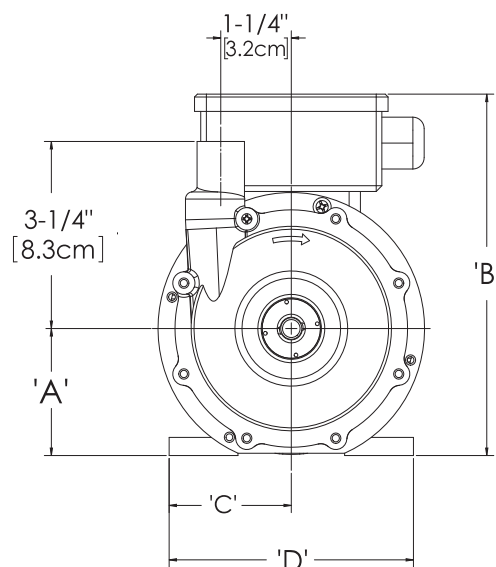

Motor Frame	A	B	C	D	E	F	G	H	I	J	K	L	Weight - lbs. [kg]	
													PP	PVDF
IEC 63 w/B14	2-15/32" [6.3 cm]	6-3/4" [17.1 cm]	2-23/32" [6.9 cm]	5-13/32" [13.7 cm]	12-25/32" [32.5 cm]	4-7/8" [12.4 cm]	3/4" [1.9 cm]	6-25/32" [17.2 cm]	3-5/32" [8 cm]	3-15/16" [10 cm]	1-31/32" [5 cm]	1/4" [0.58 cm]	3.7 [1.7]	4.05 [1.84]
IEC 71 w/B14	2-13/16" [7.1 cm]	7-3/16" [18.3 cm]	2-23/32" [6.9 cm]	5-13/32" [13.7 cm]	13-5/16" [33.8 cm]	5-5/32" [13.1 cm]	3/4" [1.9 cm]	7-1/32" [17.9 cm]	3-17/32" [9 cm]	4-3/8" [11.1 cm]	2-3/16" [5.6 cm]	5/16" [0.8 cm]	3.9 [1.77]	4.35 [1.97]

Dimensions and weights are for reference only. Weights listed are for pump only; motor not included.